
Storage Unit

Assembly Instructions - please keep for future reference

Y0888

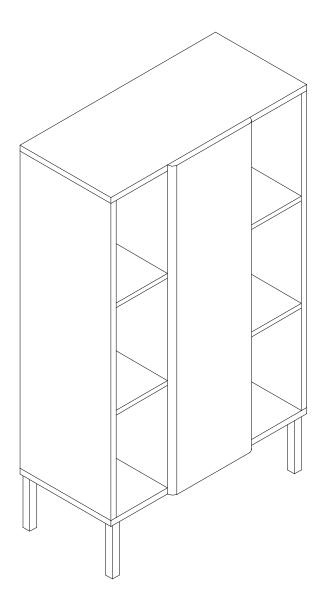

Dimensions

Width - 57cm

Depth - 28.5cm

Height - 96.5cm

Important – Please read these instructions fully before starting assembly



Safety and Care Advice

Important – Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on page 2
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.

- During assembly do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



 We do not recommend the use of power drill/drivers for inserting screws, as this could damage

the using. Only use hand screwdrivers

Care and maintenance

- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste.
 Take to your local authority waste disposal centre.

Handy Hints

- Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts
- Regularly check and ensure that all bolts and fittings are tightend properly.

WARNING In order to help prevent overturning – please follow these instructions

To help prevent product toppling over please follow the below steps:-

Must use the anti tip strap or wall fixing method provided (Whichever applies) Do not allow children to climb or hang on the furniture

Do not open more than one drawer at a time

Do not open more than one drawer at a time

Do not place heavy items in the top drawers


Do not place heavy items on top of the furniture, unless the furniture has been designed for this purpose

Please note that only the anti tip strap is provided.


You will need to provide wall plugs and screws applicable for your wall type

Components - Panels


Please check you have all the panels listed below




Left Side Panel x 1 (80(w) x 26.5(d)cm)




Middle Left Panel x 1 (80(w) x 26.5(d) cm)




Right Side Panel x 1 (80(w) x 26.5(d) cm)



Middle Right Panel x 1 (80(w) x 26.5(d) cm)




Top Panel x 1 (57(w) x 26.5(d)cm)




Base Panel x 1 (57(w) x 26.5(d)cm)




Open Shelves x 4 (24.7(w) x 15(d) cm)




B Door Panel x 1 (83(w) x 24(d) cm)



Adjustable Shelves x 2 (24(w) x 21(d) cm)



Side Back Panels x 2 (80.5(w) x 15.5(d) cm)



Central Back Panel x 1 (80.5(w) x 21.5(d) cm)



Legs x 4 (13(w) x 10(d) cm)


Components - Fittings

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A	B	©	0
Male Camlocks x 24	Female Camlocks x 24	30mm Dowel x 8	Shelf Supports x 8
(*) 111111111-	(*)1111-	G	(8)
35mm Screw x 8	12mm Screw x 9	Push Catch x 1	18mm Screw x 1
		®	
Hinges x 2	14mm Screw x 24	14mm Screw x 16	Catch Plate x 1
Panel Stiffeners x 12	Wall Strap x 1		

Tools required




Ruler – Use this ruler to help correctly identify the screws

0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170

Using Camlocks


Step 1

Connect the male camlock as directed in the assembly instructions using a screwdriver.



Step 3


Push the male camlock into the entry hole.



Step 2

Insert the female camlock as shown in the instructions.

Note: ensure that the arrow on the top of the camlock points towards the entry hole for the male camlock.




Step 4

Turn the female camlock clockwise with a screwdriver.

You should feel a click when the camlock is locked in place.

The joint is now secure.



Step 1

- 1. Into Left Side Panel 1 insert a total of 4 x Male Camlocks A as shown.
- 2. Locate 2 x Open Shelves7 onto Male Camlocks
- 3. Into holes shown in Side Panels 7 Insert 4 x Female Camlocks B as shown. Use a screwdriver to turn the Female Camlocks Clockwise to lock


For more information refer to the Using Camlocks Section

Step 2

- 1. Into Middle Left Panel 2 insert a total of 4 x Male Camlocks A as shown.
- 2. Locate 2 x Open Shelves

 7 onto Male Camlocks
- 3. Into holes shown in Side Panels 7 Insert
 4 x Female Camlocks B
 as shown. Use a screwdriver to turn the Female Camlocks
 Clockwise to lock

For more information refer to the Using Camlocks Section

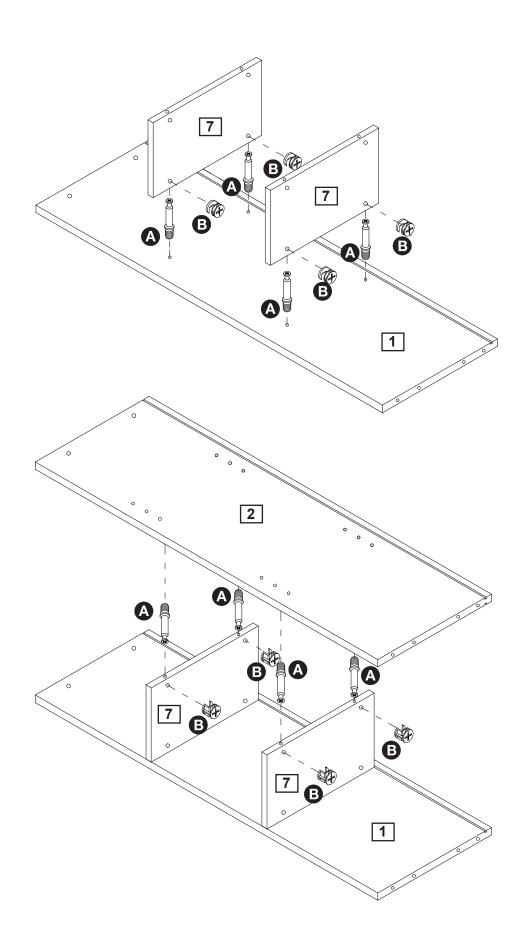

Step 3


- 1. Into Right Side Panel 3 insert a total of 4 x Male Camlocks A as shown.
- 2. Locate 2 x Open Shelves7 onto Male Camlocks
- 3. Into holes shown in Side Panels 7 Insert
 4 x Female Camlocks B as shown. Use a screwdriver to turn the Female Camlocks Clockwise to lock

For more information refer to the Using Camlocks Section

Step 4

- 1. Into Middle Right Panel 4 insert a total of 4 x Male Camlocks A as shown.
- 2. Locate 2 x Open Shelves7 onto Male Camlocks
- 3. Into holes shown in Side Panels 7 Insert
 4 x Female Camlocks B
 as shown. Use a screwdriver to turn the Female Camlocks
 Clockwise to lock


For more information refer to the Using Camlocks Section

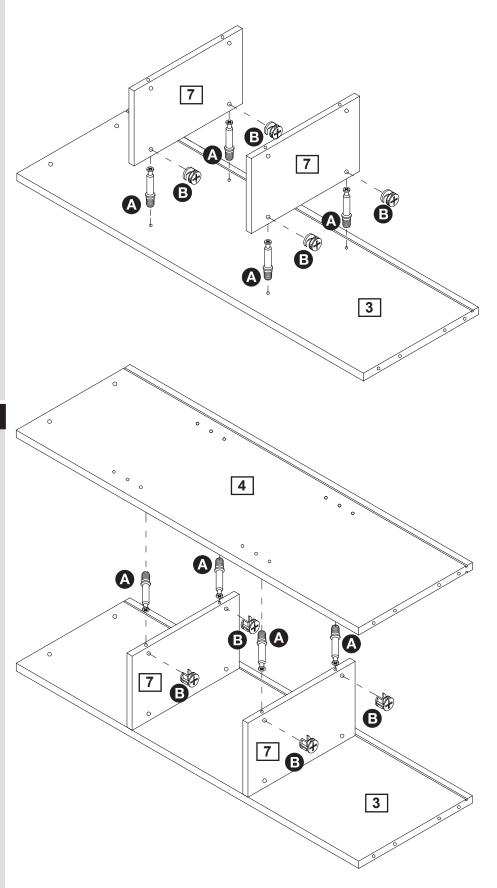

Step 5


- 1. Into the ends of Panels

 1 2 3 and 4 insert
 a total of 8 x Dowels 6
 as shown.
- 2. Locate Base Panel 6 onto Dowels
- 3. Connect Panel 6 using 8 x Screws 6 as shown

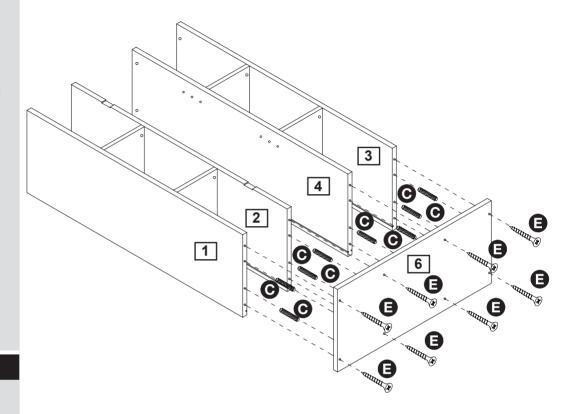

Step 6

1. Connect 4 x Legs 12 to Base Panel 6 using 6 x Screw per Leg

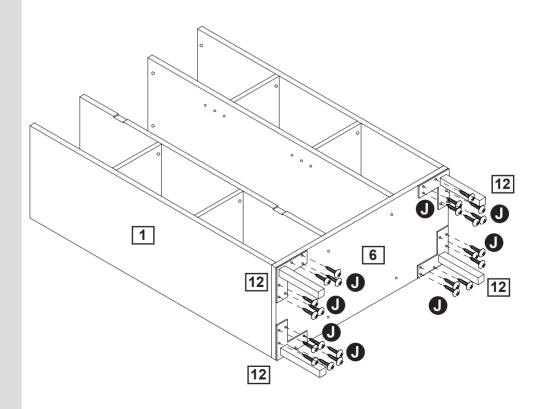


Step 7

1. To Top Panel 5 install Push Catch 6 using 4 x Screw

Step 8

- 1. Into the underside of Top Panel 5 install 8 x Male Camlocks A as shown
- 2. Slide Back Panels 11 and 2 x 10 into Position
- 3. Locate Top Panel 5 onto Panels 1 2 3 and 4
- 4. Into holes shown in Panels 1 2 3 and 4 Insert 8 x Female Camlocks B as shown. Use a screwdriver to turn the Female Camlocks Clockwise to lock

For more information refer to the Using Camlocks

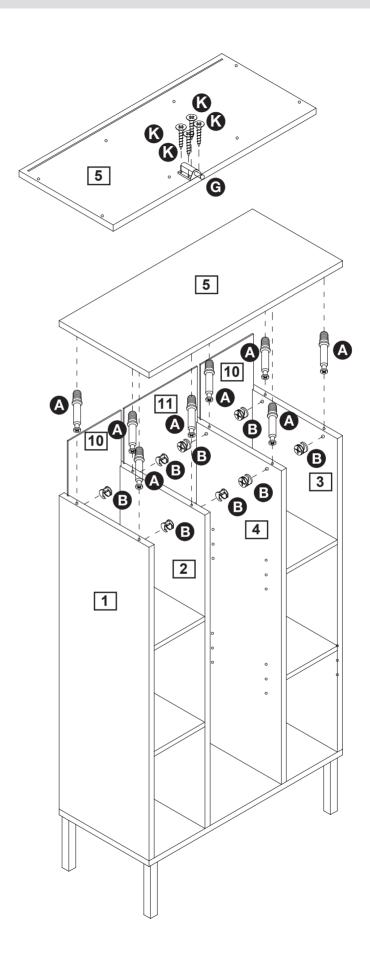


Step 9

1. On the reverse of the unit install a total of 12 x Panel Stiffeners as shown using 12 x Screws

Step 10

- 1. Connect Catch Plate
 to Door 8 using
 1 x Screw
- 2. Connect Doors 8 to Panel 2 as shown using a total of 4 x Screw per Hinge
- 3. Insert 8 x Shelf Supports **D** into holes shown
- 4. Place 2 x Shelves 9 onto Shelf Supports

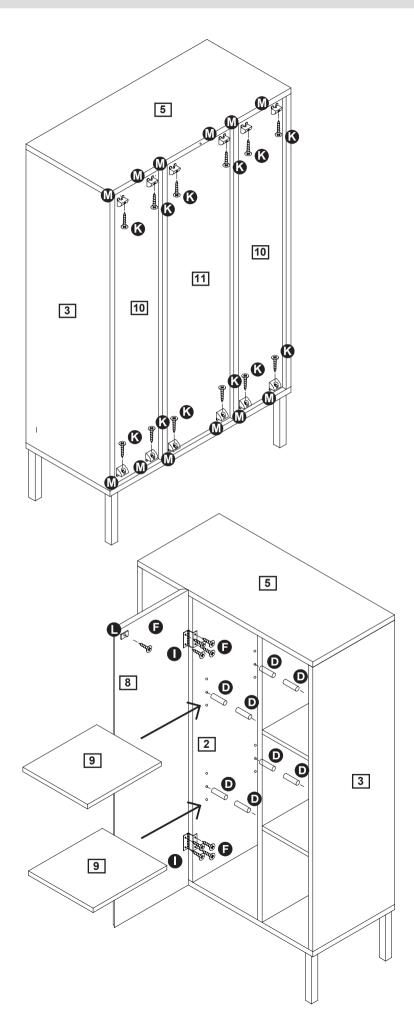

Step 11

1. To Top Panel 5 fit 1 x Wall strap as shown using 1 x Screw

The unit is floor standing, but it is recommended that the unit is secured to the wall.

- 1. Move the unit into desired position.
- 2. Mark the wall with a suitable scribe the position of the fixing hole.




Warning: Before driling,check wall for hidden pipes and cables.

- 3. Drill hole and insert a suitable Wall Plug, Please check the type of wall you are fixing to and for more information please see the guide to wall mounting & Fixings on the back page
- 4. Secure the strap to the wall using a suitable wall screw

Note: To hide the straps behind the unit, drill the holes lower than the top of the unit

Assembly Complete

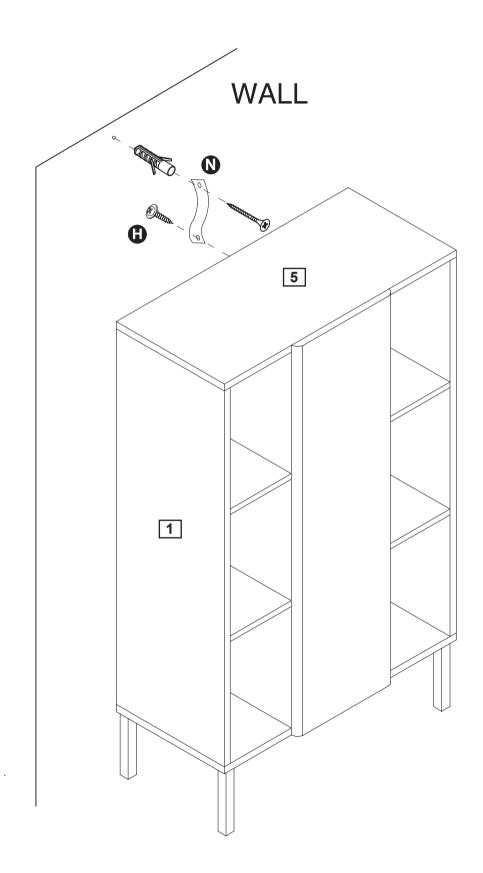

A Guide to Wall Mounting & Fixings

Important note:

If plastic wall plugs (rawl plugs) are supplied with your product, e.g.:



- these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.

Failure of the product due to using the incorrect fixings is the responsibility of the installer.



Important: when drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for **supporting your unit. Consult a qualified tradesperson if you** are unsure.


Hints:

- 1: General rule: Always use a larger screw and wall plug if you are
- 2: Ensure you use the recommended drill bit to match the wall plug and hole size.
- 3: Ensure you drill the hole horizontally; do not force the drill or enlarge the hole.
- 4: Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.
- 5: Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types of walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone or wood.

No.1 "General Purpose" wall plug




Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

No.2 " Plasterboard" wall plug




For use when attaching light loads onto plasterboard partitions.

No.3 "Cavity Fixing" wall plug




For use with plasterboard partitions or hollow wooden doors.

No.4 " Cavity Fixing – Heavy Duty" wall plug




For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

No.5 "Hammer Fixing" wall plug



For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

No.6 " Shield Anchor" wall plug – heavy loads



For use with heavier loads such as TV and HiFi speakers and satellite dishes etc.



Safety: always check the fitting and location to ensure your safety in and around the home.

Fitting: from time to time check the fitting to ensure the wall plugs or screws do not become loose.